



SLOPE RATIO AND SEPARATION FOR TIERED ROCKERIES				
STATION		TIER # TO TIER #	MIN. TIER SEPARATION D (m)	MAX. SLOPE RATIO BETWEEN TIERS V:H
BEGIN	END			

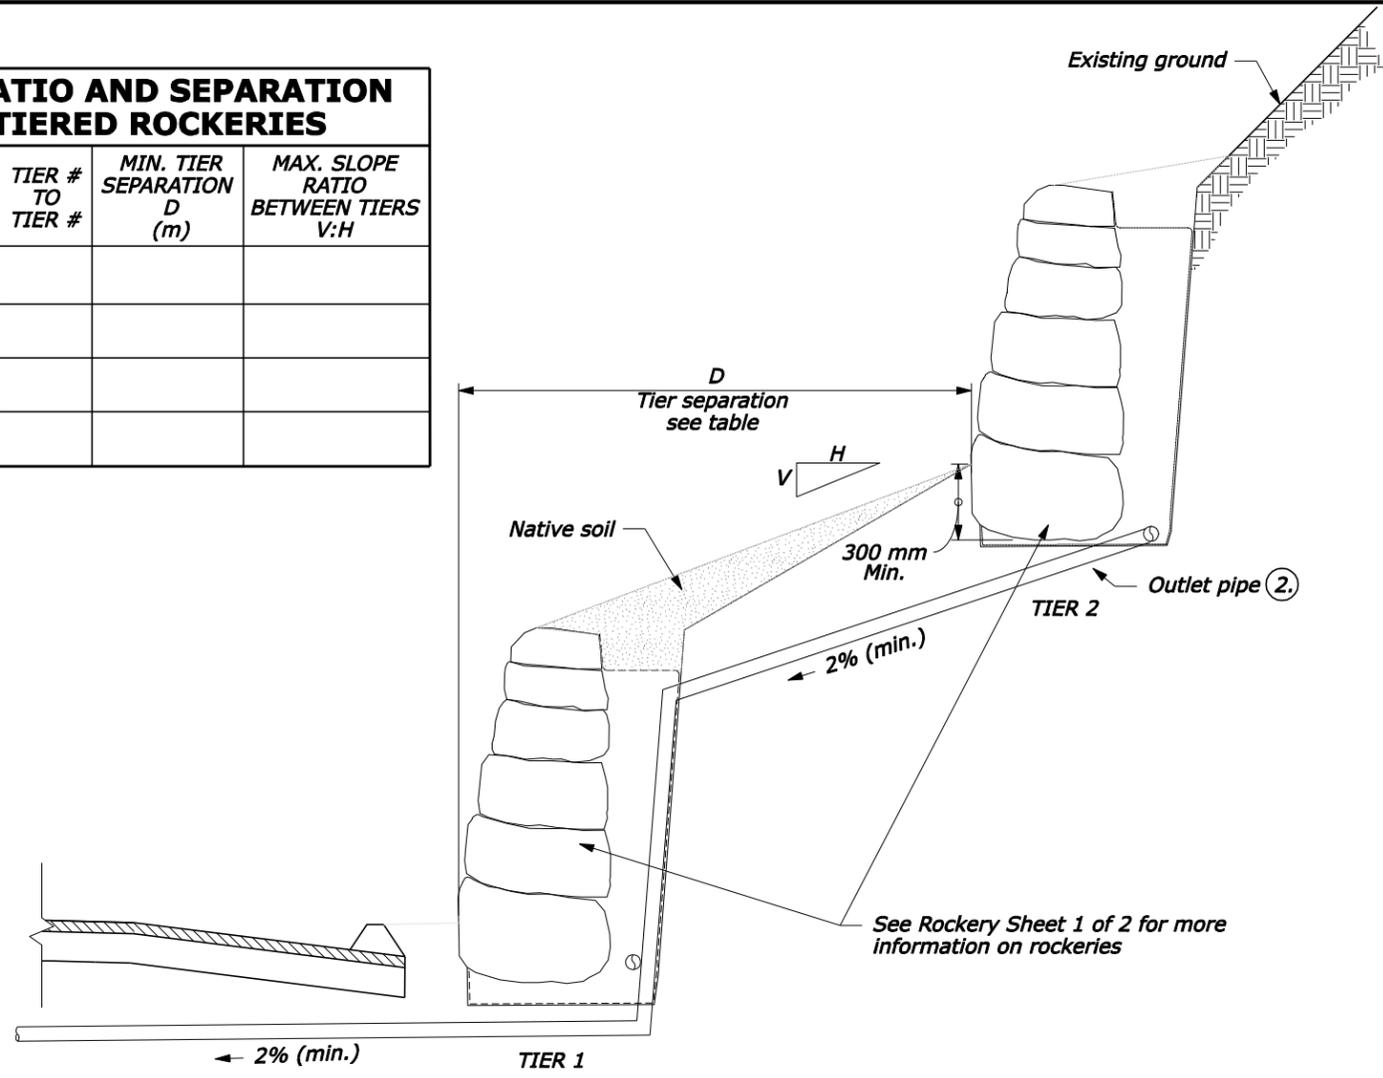


**NOTE:**

1. See Rockery Sheet 1 of 2.
2. Install 100 mm diameter non-perforated outlet pipe at low points in the rockery and at 30 m (max.) spacing. Do not connect to drainage system for lower tier. Drainage systems for the upper and lower tiers outlet independently.
3. Place rocks according to Subsection 252.03(d) of the SCRs.


**ROCKERY WITH TIERS  
TYPICAL SECTION**

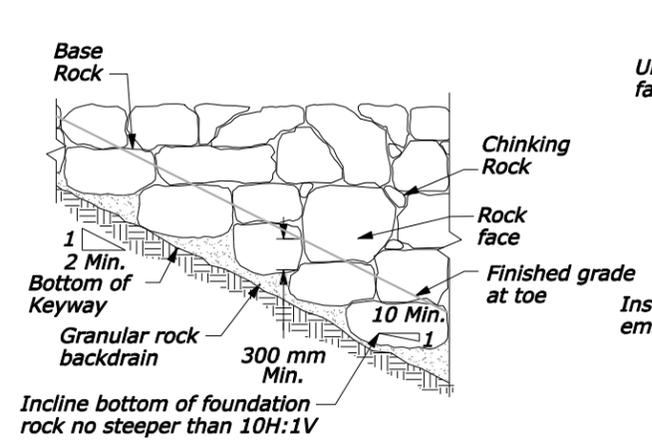


**CORRECT  
PARTIAL TYPICAL PROFILE**

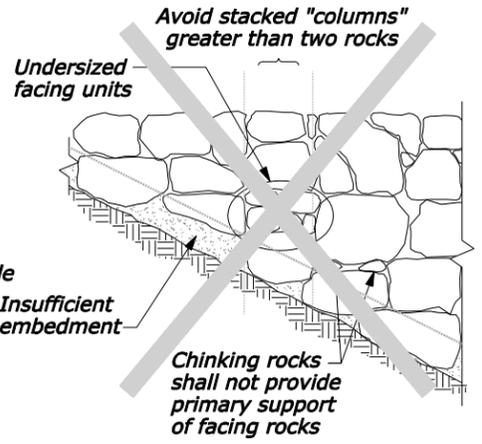


**INCORRECT**

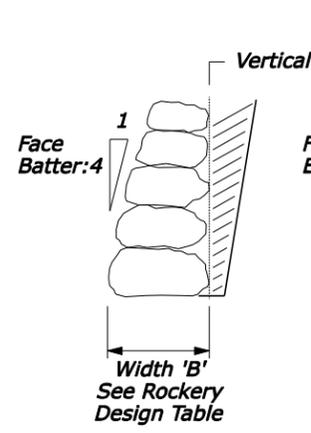

**CORRECT**

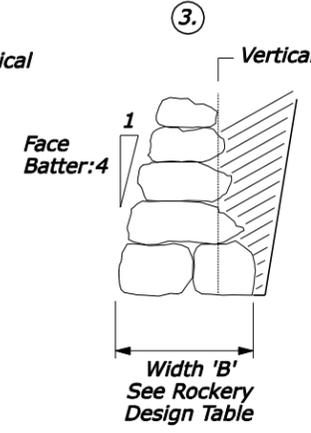

**CORRECT**

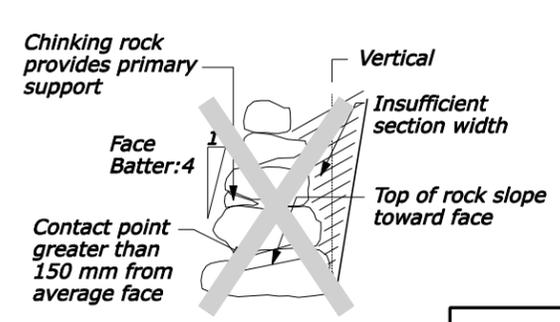

**INCORRECT**

**SECTION PROPERTIES**

NOT TO SCALE

U.S. DEPARTMENT OF TRANSPORTATION FEDERAL HIGHWAY ADMINISTRATION CENTRAL FEDERAL LANDS HIGHWAY DIVISION	
METRIC SPECIAL	
<b>ROCKERY</b>	
Sheet 2 of 2	
	SPECIAL M252-A

2/20/2009 12:25:57 PM N:\ICFL-DPT\Details Team\for\_website\sp252-A.dgn