REG	STATE	PROJECT	SHEET NO.	TOTAL SHEETS
.	.	.	.	.

SLOPE RATIO AND SEPARATION FOR TIERED ROCKERIES

STATION		TIER # TO TIER #	MIN. TIER SEPARATION D (ft)	MAX. SLOPE RATIO BETWEEN TIERS V:H
BEGIN	END			

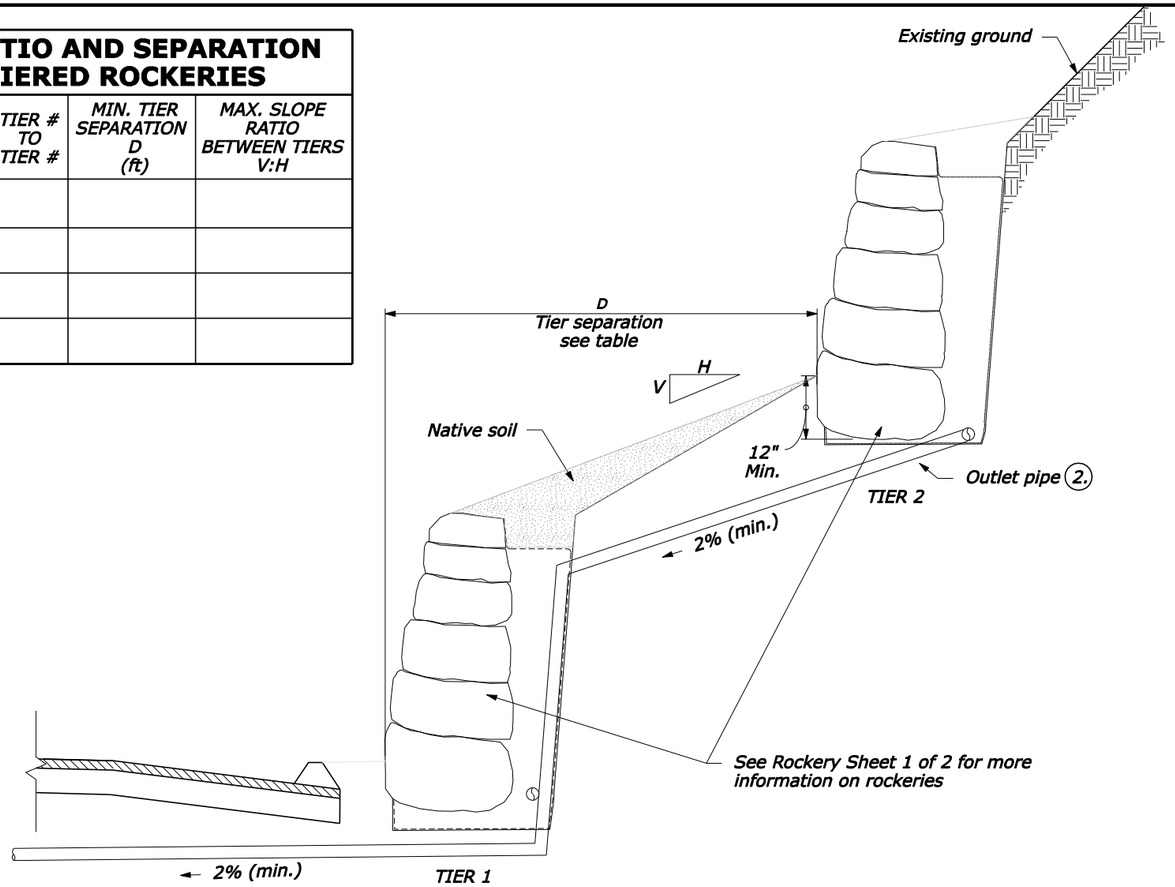

ROCKERY WITH TIERS TYPICAL SECTION

NOTE:

1. See Rockery Sheet 1 of 2.
2. Install 4 inch diameter non-perforated outlet pipe at low points in the rockery and at 100 feet (max.) spacing. Do not connect to drainage system for lower tier. Drainage systems for the upper and lower tiers outlet independently.
3. Place rocks according to Subsection 252.03(d) of the SCRs.

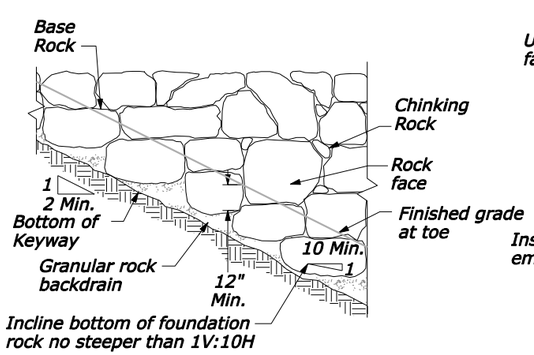

CORRECT

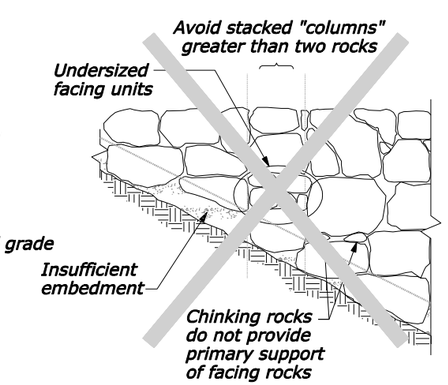

INCORRECT

PARTIAL TYPICAL PROFILE

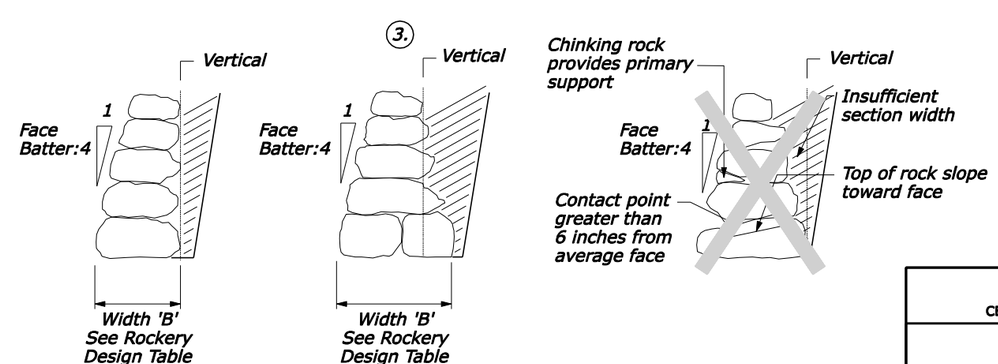

CORRECT CORRECT INCORRECT

SECTION PROPERTIES

NOT TO SCALE

U.S. DEPARTMENT OF TRANSPORTATION
FEDERAL HIGHWAY ADMINISTRATION
CENTRAL FEDERAL LANDS HIGHWAY DIVISION

U.S. CUSTOMARY SPECIAL

ROCKERY

Sheet 2 of 2

SPECIAL
252-A

2/20/2009 12:24:06 PM N:\CFL-DPIT\Details Team\for_website\sp252-A.dgn